


Vibro-STRIP

RUBBER STRIP

Vibro-Strip is an elastomer bearing system with hemi-cylindrical shape. Due to its ingenious profile cross-section, it is suitable for use as an elastic support for structural components.

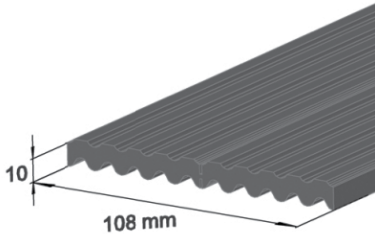

Vibro-Strip is primarily used at the base of machinery to achieve vibration control. It can also be used as an elastic pad between the structural parts (columns, walls, bridges, tanks, etc.) for smoothing out structural forces. It can be easily cut in any dimension (e.g. washers) according to the weight of the supported machine.

It can also be easily cut in the middle due to its special V-shape incisor. There are various ways of installation, according to the amount of vibration reduction required.

Maximum Load 1.5 tones per linear meter.

Dimensions : Thickness (max) 10 mm, Width 108 mm
Available in rolls of 3m length




Installation Examples


Single Layer



Double layer, one layer on the other (inverted)



Double layer, one layer on the other



Double layer, one layer inside the other



Design and Production according to Quality Management System **ISO 9001.2008** & Environmental Management System **ISO 14001.2004**